

SINGLE CHAMBER MACHINES

GK 160 / 191 / 193





Standard equipment

- ◆ Parallel sealing or single sealing + separate sealing.
- ◆ 10 programs.
- ◆ Vacuum sensor with steam point detection.

Options

- ◆ Gas flushing.
- ◆ Controllable separate sealing (only GK 191 / GK 193).
- ◆ Biactive sealing (only GK 191 / GK 193).


Your benefits

- ◆ Constructed of corrosion-resistant stainless steel.
- ◆ Movable on lockable rollers.
- ◆ GK 160: Transparent lid.
- ◆ GK 191 / GK 193: Stainless steel lid.
- ◆ Digital control with 10 programs.
- ◆ Waterproof rating IP65.
- ◆ Vacuum sensor with steam point detection.
- ◆ Built-in BUSCH vacuum pump with motor protection.
- ◆ Reliable and easy to service.
- ◆ Hygienic design – easy to clean.
- ◆ Easy to operate.




Digital control

- ◆ Simple and easy touch-screen operation.
- ◆ Electronic monitoring of the work process and displays in comprehensible and well-arranged on-screen menus.

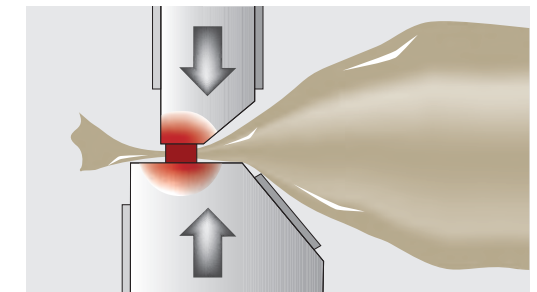

The **biactive sealing** guarantees safe and reliable seals despite folds, fats, oils and moisture in the seal area.

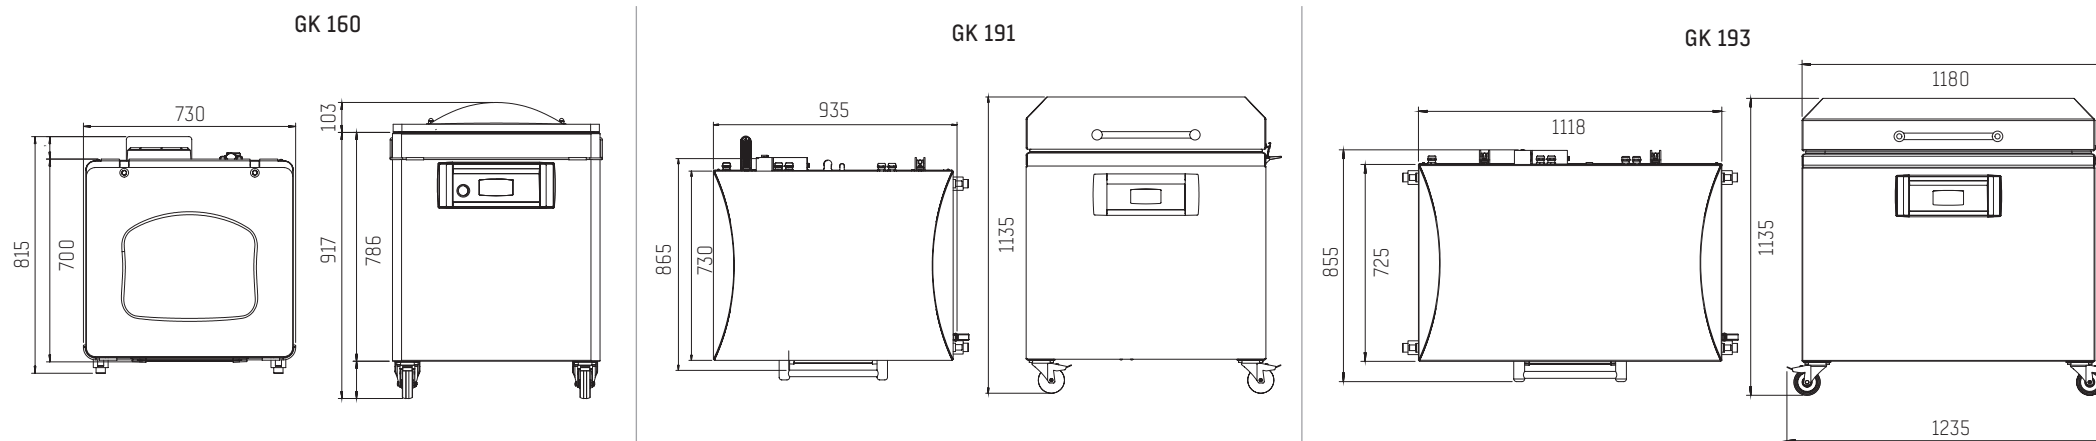

Technical data	GK 160	GK 191	GK 193
External dimensions (l x w x h)	735 x 815 x 1020 mm	935 x 1000 x 1140 mm	1135 x 1000 x 1140 mm
Chamber dimensions (l x w x h)	500 x 520 x 220 mm	805 x 605 x 210 mm	1050 x 605 x 210 mm
Sealing bar length front + rear	X	2 x 820 mm	2 x 1020 mm
Sealing bar length left + right	2 x 520 mm	2 x 620 mm	2 x 620 mm
Sealing bar length front + right	X	780 x 520 mm	980 x 520 mm
Spacing between the bars front + rear	X	540 mm	540 mm
Spacing between the bars left + right	500 mm	745 mm	945 mm
Max. product length front + right	X	805 mm	1005 mm
Max. product height	220 mm	210 mm	210 mm
Built-in Busch vacuum pump	40 / 63 m ³ /h	100 / 160 m ³ /h	160 / 300 m ³ /h
Connection power	1.9 / 2.3 kW	3.8 / 5.6 kW	5.6 / 9.1 kW
Weight approx.	180 kg	260 kg	280 kg
Power supply	230 V, 3 Ph, 50 Hz 400 V, 3 Ph, 50 Hz	230 V, 3 Ph, 50 Hz 400 V, 3 Ph, 50 Hz	230 V, 3 Ph, 50 Hz 400 V, 3 Ph, 50 Hz



supervac 
FIRST CLASS PERFORMANCE

Supervac Maschinenbau GmbH
Kalterer Gasse 10
2340 Mödling | Austria

T: +43 2236 50 25 00

E-mail: office@supervac.at
Web: www.supervac.at